



European Network of
Transmission System Operators
for Electricity

STEADY STATE INSTRUCTION PROFILE SPECIFICATION

2022-02-16

SOC APPROVED
VERSION 1.0

1 Copyright notice:

2 **Copyright © ENTSO-E. All Rights Reserved.**

3 This document and its whole translations may be copied and furnished to others, and derivative
4 works that comment on or otherwise explain it or assist in its implementation may be prepared,
5 copied, published and distributed, in whole or in part, without restriction of any kind, provided
6 that the above copyright notice and this paragraph are included on all such copies and
7 derivative works. However, this document itself may not be modified in any way, except for
8 literal and whole translation into languages other than English and under all circumstances, the
9 copyright notice or references to ENTSO-E may not be removed.

10 This document and the information contained herein is provided on an "as is" basis.

11 **ENTSO-E DISCLAIMS ALL WARRANTIES, EXPRESS OR IMPLIED, INCLUDING BUT NOT**
12 **LIMITED TO ANY WARRANTY THAT THE USE OF THE INFORMATION HEREIN WILL NOT**
13 **INFRINGE ANY RIGHTS OR ANY IMPLIED WARRANTIES OF MERCHANTABILITY OR**
14 **FITNESS FOR A PARTICULAR PURPOSE.**

15 **This document is maintained by the ENTSO-E CIM EG. Comments or remarks are to be**
16 **provided at cim@entsoe.eu**

17 **NOTE CONCERNING WORDING USED IN THIS DOCUMENT**

18 The force of the following words is modified by the requirement level of the document in which
19 they are used.

- 20 • **SHALL:** This word, or the terms "REQUIRED" or "MUST", means that the definition is an
21 absolute requirement of the specification.
- 22 • **SHALL NOT:** This phrase, or the phrase "MUST NOT", means that the definition is an
23 absolute prohibition of the specification.
- 24 • **SHOULD:** This word, or the adjective "RECOMMENDED", means that there may exist valid
25 reasons in particular circumstances to ignore a particular item, but the full implications must
26 be understood and carefully weighed before choosing a different course.
- 27 • **SHOULD NOT:** This phrase, or the phrase "NOT RECOMMENDED", means that there may
28 exist valid reasons in particular circumstances when the particular behaviour is acceptable
29 or even useful, but the full implications should be understood and the case carefully weighed
30 before implementing any behaviour described with this label.
- 31 • **MAY:** This word, or the adjective "OPTIONAL", means that an item is truly optional.

32

33

Revision History

Version	Release	Date	Paragraph	Comments
0	1	2021-10-12		For CIM EG review
1	0	2022-02-16		Approved by SOC.

34	CONTENTS		
35	Copyright notice:.....		2
36	Revision History.....		3
37	CONTENTS		4
38	1 Introduction		6
39	2 Application profile specification		6
40	2.1 Version information		6
41	2.2 Constraints naming convention		6
42	2.3 Profile constraints		7
43	2.4 Metadata.....		9
44	2.4.1 Constraints		9
45	2.4.2 Reference metadata		9
46	3 Detailed Profile Specification		9
47	3.1 General.....		9
48	3.2 (NC,Description) DCController root class		10
49	3.3 (NC,Description) PTCActivePowerSupport root class		10
50	3.4 (NC,Description) AreaDispatchableUnit root class		11
51	3.5 (NC,Description) BiddingZone root class		11
52	3.6 (NC,Description) BiddingZoneBorder root class		11
53	3.7 (NC,Description) CircuitShare root class		12
54	3.8 (Description) Equipment root class		12
55	3.9 (abstract,NC) GridStateAlteration root class.....		12
56	3.10 (NC,Description) PowerTransferCorridor root class		12
57	3.11 (NC) RemedialActionScheme root class		13
58	3.12 (NC) StageTrigger root class.....		13
59	3.13 UnitMultiplier enumeration		13
60	3.14 UnitSymbol enumeration		14
61	3.15 PerCent datatype		20
62	3.16 ActivePower datatype		20
63	3.17 String primitive.....		20
64	3.18 Date primitive.....		20
65	3.19 DateTime primitive		20
66	3.20 Float primitive		20
67	3.21 Duration primitive.....		20
68	3.22 Boolean primitive		21
69	Annex A (informative): Sample data		22
70	A.1 General.....		22
71	A.2 Sample instance data.....		22
72			
73	List of figures		
74	Figure 1 – Class diagram SteadyStateInstructionProfile::SteadyStateInstructionProfile		10
75			

76 List of tables

77	Table 1 – Attributes of SteadyStateInstructionProfile::DCController	10
78	Table 2 – Attributes of SteadyStateInstructionProfile::PTCActivePowerSupport	10
79	Table 3 – Attributes of SteadyStateInstructionProfile::AreaDispatchableUnit	11
80	Table 4 – Attributes of SteadyStateInstructionProfile::BiddingZone	11
81	Table 5 – Attributes of SteadyStateInstructionProfile::BiddingZoneBorder	11
82	Table 6 – Attributes of SteadyStateInstructionProfile::CircuitShare	12
83	Table 7 – Attributes of SteadyStateInstructionProfile::Equipment	12
84	Table 8 – Attributes of SteadyStateInstructionProfile::GridStateAlteration	12
85	Table 9 – Attributes of SteadyStateInstructionProfile::PowerTransferCorridor	13
86	Table 10 – Attributes of SteadyStateInstructionProfile::RemedialActionScheme	13
87	Table 11 – Attributes of SteadyStateInstructionProfile::StageTrigger	13
88	Table 12 – Literals of SteadyStateInstructionProfile::UnitMultiplier	14
89	Table 13 – Literals of SteadyStateInstructionProfile::UnitSymbol	15
90	Table 14 – Attributes of SteadyStateInstructionProfile::PerCent	20
91	Table 15 – Attributes of SteadyStateInstructionProfile::ActivePower	20
92		

93 1 Introduction

94 The steady state instruction profile enables an exchange of additional information related to
95 MTU.

96 2 Application profile specification

97 2.1 Version information

98 The content is generated from UML model file CGMES30v25_501-20v01_HeaderMetaData-
99 10v08_NC20v70.eap.

100 This edition is based on the IEC 61970 UML version 'IEC61970CIM17v40', dated '2020-08-24'.

- 101 - Title: Steady state instruction Vocabulary
- 102 - Keyword: SSI
- 103 - Description: This vocabulary is describing the steady state instruction profile.
- 104 - Version IRI: <http://entsoe.eu/ns/CIM/SteadyStateInstruction-EU/1.0>
- 105 - Version info: 1.0.0
- 106 - Prior version:
- 107 - Conforms to: urn:iso:std:iec:61970-600-2:ed-1|urn:iso:std:iec:61970-301:ed-
108 7:amd1|file:///iec61970cim17v40_iec61968cim13v13a_iec62325cim03v17a.eap|urn:iso:
109 std:iec:61970-401:draft:ed-1|urn:iso:std:iec:61970-501:draft:ed-2|file:///CGMES-
110 30v25_501-20v01.eap
- 111 - Identifier: urn:uuid:6d01969f-38fd-460d-b260-b839a8123319

112

113 2.2 Constraints naming convention

114 The naming of the rules shall not be used for machine processing. The rule names are just a
115 string. The naming convention of the constraints is as follows.

116 "{rule.Type}:{rule.Standard}:{rule.Profile}:{rule.Property}:{rule.Name}"

117 where

118 rule.Type: C – for constraint; R – for requirement

119 rule.Standard: the number of the standard e.g. 301 for 61970-301, 456 for 61970-456, 13 for
120 61968-13. 61970-600 specific constraints refer to 600 although they are related to one or
121 combination of the 61970-450 series profiles. For NC profiles, NC is used.

122 rule.Profile: the abbreviation of the profile, e.g. TP for Topology profile. If set to "ALL" the
123 constraint is applicable to all IEC 61970-600 profiles.

124 rule.Property: for UML classes, the name of the class, for attributes and associations, the name
125 of the class and attribute or association end, e.g. EnergyConsumer, IdentifiedObject.name, etc.
126 If set to "NA" the property is not applicable to a specific UML element.

127 rule.Name: the name of the rule. It is unique for the same property.

128 Example: C:600:ALL:IdentifiedObject.name:stringLength

129 2.3 Profile constraints

130 This clause defines requirements and constraints that shall be fulfilled by applications that
131 conform to this document.

132 This document is the master for rules and constraints tagged "NC". For the sake of self-
133 containment, the list below also includes a copy of the relevant rules from IEC 61970-452,
134 tagged "452".

- 135 • C:452:ALL:NA:datatypes

136 According to 61970-501, datatypes are not exchanged in the instance data. The
137 UnitMultiplier is 1 in cases none value is specified in the profile.

- 138 • R:452:ALL:NA:exchange

139 Optional and required attributes and associations must be imported and exported if they
140 are in the model file prior to import.

- 141 • R:452:ALL:NA:exchange1

142 If an optional attribute does not exist in the imported file, it does not have to be exported
143 in case exactly the same data set is exported, i.e. the tool is not obliged to automatically
144 provide this attribute. If the export is resulting from an action by the user performed after
145 the import, e.g. data processing or model update the export can contain optional
146 attributes.

- 147 • R:452:ALL:NA:exchange2

148 In most of the profiles the selection of optional and required attributes is made so as to
149 ensure a minimum set of required attributes without which the exchange does not fulfil
150 its basic purpose. Business processes governing different exchanges can require
151 mandatory exchange of certain optional attributes or associations. Optional and required
152 attributes and associations shall therefore be supported by applications which claim
153 conformance with certain functionalities of the IEC 61970-452. This provides flexibility
154 for the business processes to adapt to different business requirements and base the
155 exchanges on IEC 61970-452 compliant applications.

- 156 • R:452:ALL:NA:exchange3

157 An exporter may, at his or her discretion, produce a serialization containing additional
158 class data described by the CIM Schema but not required by this document provided
159 these data adhere to the conventions established in Clause 5.

- 160 • R:452:ALL:NA:exchange4

161 From the standpoint of the model import used by a data recipient, the document
162 describes a subset of the CIM that importing software shall be able to interpret in order
163 to import exported models. Data providers are free to exceed the minimum requirements
164 described herein as long as their resulting data files are compliant with the CIM Schema
165 and the conventions established in Clause 5. The document, therefore, describes
166 additional classes and class data that, although not required, exporters will, in all
167 likelihood, choose to include in their data files. The additional classes and data are
168 labelled as required (cardinality 1..1) or as optional (cardinality 0..1) to distinguish them
169 from their required counterparts. Please note, however, that data importers could
170 potentially receive data containing instances of any and all classes described by the
171 CIM Schema.

- 172 • R:452:ALL:NA:cardinality

- 173 The cardinality defined in the CIM model shall be followed, unless a more restrictive
174 cardinality is explicitly defined in this document. For instance, the cardinality on the
175 association between VoltageLevel and BaseVoltage indicates that a VoltageLevel shall
176 be associated with one and only one BaseVoltage, but a BaseVoltage can be associated
177 with zero to many VoltageLevels.
- 178 • R:452:ALL:NA:associations
- 179 Associations between classes referenced in this document and classes not referenced
180 here are not required regardless of cardinality.
- 181 • R:452:ALL:IdentifiedObject.name:rule
- 182 The attribute “name” inherited by many classes from the abstract class IdentifiedObject
183 is not required to be unique. It must be a human readable identifier without additional
184 embedded information that would need to be parsed. The attribute is used for purposes
185 such as User Interface and data exchange debugging. The MRID defined in the data
186 exchange format is the only unique and persistent identifier used for this data exchange.
187 The attribute IdentifiedObject.name is, however, always required for CoreEquipment
188 profile and Short Circuit profile.
- 189 • R:452:ALL:IdentifiedObject.description:rule
- 190 The attribute “description” inherited by many classes from the abstract class
191 IdentifiedObject must contain human readable text without additional embedded
192 information that would need to be parsed.
- 193 • R:452:ALL:NA:uniqueIdentifier
- 194 All IdentifiedObject-s shall have a persistent and globally unique identifier (Master
195 Resource Identifier - mRID).
- 196 • R:452:ALL:NA:unitMultiplier
- 197 For exchange of attributes defined using CIM Data Types (ActivePower, Susceptance,
198 etc.) a unit multiplier of 1 is used if the UnitMultiplier specified in this document is “none”.
- 199 • C:452:ALL:IdentifiedObject.name:stringLength
- 200 The string IdentifiedObject.name has a maximum of 128 characters.
- 201 • C:452:ALL:IdentifiedObject.description:stringLength
- 202 The string IdentifiedObject.description is maximum 256 characters.
- 203 • C:452:ALL:NA:float
- 204 An attribute that is defined as float (e.g. has a type Float or a type which is a Datatype
205 with .value attribute of type Float) shall support ISO/IEC 60559:2020 for floating-point
206 arithmetic using single precision floating point. A single precision float supports 7
207 significant digits where the significant digits are described as an integer, or a decimal
208 number with 6 decimal digits. Two float values are equal when the significant with 7
209 digits are identical, e.g. 1234567 is equal 1.234567E6 and so are 1.2345678 and
210 1.234567E0.
- 211 • C:NC:SSI:GridStateAlteration.inService.dependency

212 If GridStateAlteration.inService is false, then GridStateAlteration.enabled shall be false
213 or missing (NULL). If GridStateAlteration.inService is true, then
214 GridStateAlteration.enabled is required and it can be true or false.

215

216

217 **2.4 Metadata**

218 ENTSO-E agreed to extend the header and metadata definitions by IEC 61970-552 Ed2. This
219 new header definitions rely on W3C recommendations which are used worldwide and are
220 positively recognised by the European Commission. The new definitions of the header mainly
221 use Provenance ontology (PROV-O), Time Ontology and Data Catalog Vocabulary (DCAT). The
222 global new header applicable for this profile is included in the metadata and document header
223 specification document.

224 The header vocabulary contains all attributes defined in IEC 61970-552. This is done only for
225 the purpose of having one vocabulary for header and to ensure transition for data exchanges
226 that are using IEC 61970-552:2016 header. This profile does not use IEC 61970-552:2016
227 header attributes and relies only on the extended attributes.

228 **2.4.1 Constraints**

229 The identification of the constraints related to the metadata follows the same convention for
230 naming of the constraints as for profile constraints.

- 231 • R:NC:ALL:wasAttributedTo:usage

232 The prov:wasAttributedTo should normally be the “X” EIC code of the actor (prov:Agent).

233


234 **2.4.2 Reference metadata**

235 The header defined for this profile requires availability of a set of reference metadata. For
236 instance, the attribute prov:wasGeneratedBy requires a reference to an activity which produced
237 the model or the related process. The activities are defined as reference metadata and their
238 identifiers are referenced from the header to enable the receiving entity to retrieve the “static”
239 (reference) information that is not modified frequently. This approach imposes a requirement
240 that both the sending entity and the receiving entity have access to a unique version of the
241 reference metadata. Therefore, each business process shall define which reference metadata
242 is used and where it is located.

243 **3 Detailed Profile Specification**

244 **3.1 General**

245 This package contains steady state instruction profile.

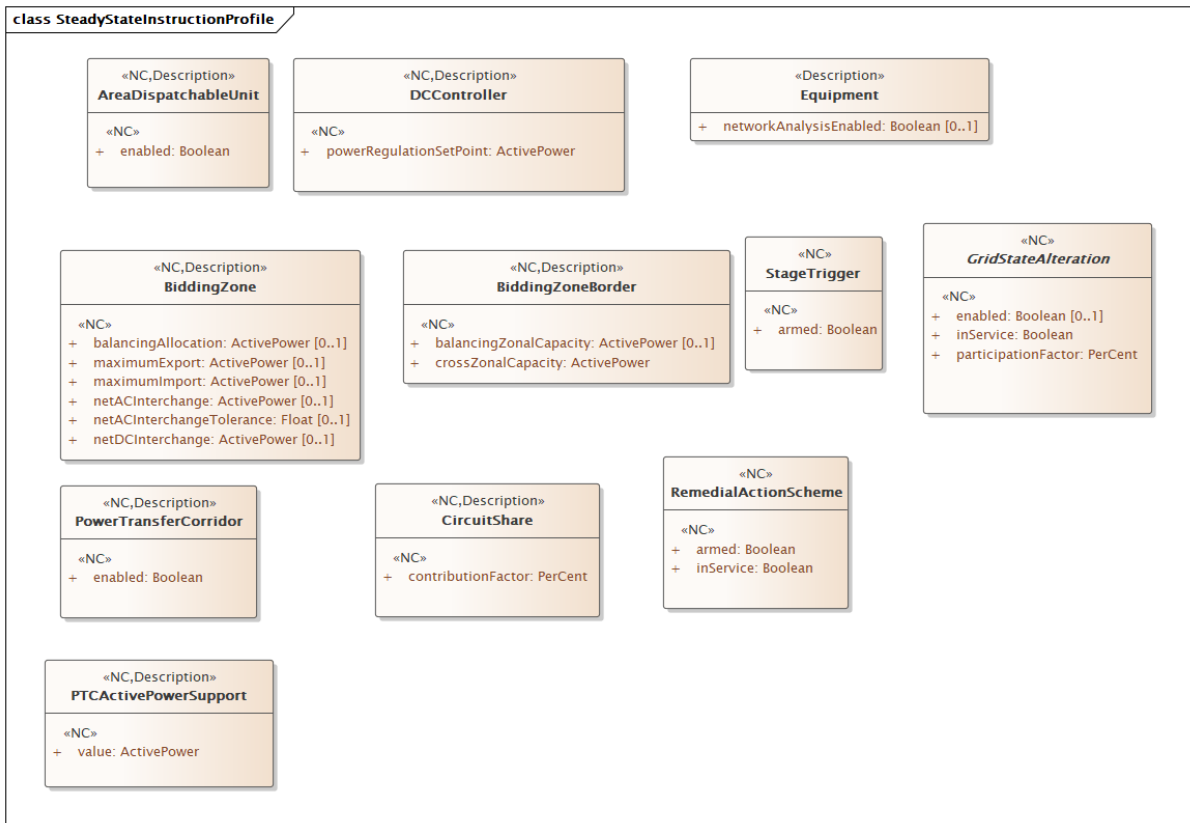

246
247 **Figure 1 – Class diagram SteadyStateInstructionProfile::SteadyStateInstructionProfile**

248 Figure 1: The diagram shows steady state instruction related classes.

249 **3.2 (NC,Description) DCController root class**

250
251 Table 1 shows all attributes of DCController.

252 **Table 1 – Attributes of SteadyStateInstructionProfile::DCController**

name	mult	type	description
powerRegulationSetPoint	1..1	ActivePower	(NC)

253
254 **3.3 (NC,Description) PTCActivePowerSupport root class**

255 Defines the active power capability (support) of the scheme in relation to a

256 PowerTransferCorridor.

257 Table 2 shows all attributes of PTCActivePowerSupport.

258 **Table 2 – Attributes of SteadyStateInstructionProfile::PTCActivePowerSupport**

name	mult	type	description
value	1..1	ActivePower	(NC) The support that a System Integrity Protection Scheme (SIPS) gives to a Power Transfer Corridor (PTC).

259

260 **3.4 (NC,Description) AreaDispatchableUnit root class**

261 Allocates a given producing or consuming unit, including direct current corridor and collection
262 of units, to a given control area (through the scheduling area) for supporting the control of the
263 given area through dispatch instruction.

264 Table 3 shows all attributes of AreaDispatchableUnit.

265 **Table 3 – Attributes of SteadyStateInstructionProfile::AreaDispatchableUnit**

name	mult	type	description
enabled	1..1	Boolean	(NC) Identifies if the unit is enabled to accept a dispatch instruction. If true, the unit is enabled to accept a dispatch instruction. If false, the unit has the capability, but it is not enabled to receive a dispatch instruction.

266

267 **3.5 (NC,Description) BiddingZone root class**

268 A bidding zone is a market-based method for handling power transmission congestion. It
269 consists of scheduling areas that include the relevant production (supply) and consumption
270 (demand) to form an electrical area with the same market price without capacity allocation.

271 Table 4 shows all attributes of BiddingZone.

272 **Table 4 – Attributes of SteadyStateInstructionProfile::BiddingZone**

name	mult	type	description
netACInterchange	0..1	ActivePower	(NC) The netted aggregation of all AC external schedules of an area. Positive sign means flow into the area.
netACInterchangeTolerance	0..1	Float	(NC) The area AC Net Position tolerance.
maximumExport	0..1	ActivePower	(NC) Maximum active power export. It represents an external constraint of the bidding zone as a result from a flow based capacity calculation.
netDCInterchange	0..1	ActivePower	(NC) The netted aggregation of all DC external schedules of an area. Positive sign means flow into the area.
maximumImport	0..1	ActivePower	(NC) Maximum active power import. It represents an external constraint of the bidding zone as a result from a flow based capacity calculation.
balancingAllocation	0..1	ActivePower	(NC) The active power allocated for balancing services with load sign convention. A negative active power represents allocation of balancing power to be exported. The net export will be maximum export minus the negative balancing. Positive numbers means allocation of import.

273

274 **3.6 (NC,Description) BiddingZoneBorder root class**

275 Defines the aggregated connection capacity between two Bidding Zones.

276 Table 5 shows all attributes of BiddingZoneBorder.

277 **Table 5 – Attributes of SteadyStateInstructionProfile::BiddingZoneBorder**

name	mult	type	description
crossZonalCapacity	1..1	ActivePower	(NC) The maximum allowed flow on the collection of interconnection between two bidding zones.
balancingZonalCapacity	0..1	ActivePower	(NC) The allocated flow for balancing between two bidding zones.

278

279 **3.7 (NC,Description) CircuitShare root class**

280 Defines the share of the circuit which is part of this power transfer corridor.

281 Table 6 shows all attributes of CircuitShare.

282

Table 6 – Attributes of SteadyStateInstructionProfile::CircuitShare

name	mult	type	description
contributionFactor	1..1	PerCent	(NC) Contribution factor for the circuit which is part of a power transfer corridor.

283

284 **3.8 (Description) Equipment root class**

285 The parts of a power system that are physical devices, electronic or mechanical.

286 Table 7 shows all attributes of Equipment.

287

Table 7 – Attributes of SteadyStateInstructionProfile::Equipment

name	mult	type	description
networkAnalysisEnabled	0..1	Boolean	The equipment is enabled to participate in network analysis. If unspecified, the value is assumed to be true.

288

289 **3.9 (abstract,NC) GridStateAlteration root class**290 Grid state alteration is a change of values of one element in the grid model compared to the
291 base case.

292 Table 8 shows all attributes of GridStateAlteration.

293

Table 8 – Attributes of SteadyStateInstructionProfile::GridStateAlteration

name	mult	type	description
enabled	0..1	Boolean	(NC) The status of the class set by operation or by signal. Optional field that will override other status fields.
participationFactor	1..1	PerCent	(NC) It defines the participation of this grid state alteration. If 0 this grid alteration does not participate. The sum of all participation factors for all grid state alterations associated with same remedial action shall be equal to 100%. In cases where only one remedial action is associated with one grid state alteration, the participation factor shall be equal to 100%.
inService	1..1	Boolean	(NC) Specifies the availability of the grid state alteration. If true, the grid state alteration is available for processing. if false, the grid state alteration is treated as if it is not in the model.

294

295 **3.10 (NC,Description) PowerTransferCorridor root class**296 A power transfer corridor is defined as a set of circuits (transmission lines or transformers)
297 separating two portions of the power system, or a subset of circuits exposed to a substantial
298 portion of the transmission exchange between two parts of the system.

299 Table 9 shows all attributes of PowerTransferCorridor.

300 **Table 9 – Attributes of SteadyStateInstructionProfile::PowerTransferCorridor**

name	mult	type	description
enabled	1..1	Boolean	(NC) It enables/disables the monitoring/assessment of a power transfer corridor. True means that the monitoring of the power transfer corridor is assessed. False means the power transfer corridor is not assessed.

301

302 **3.11 (NC) RemedialActionScheme root class**

303 Remedial Action Scheme (RAS), Special Protection Schemes (SPS), System Protection
304 Schemes (SPS) or System Integrity Protection Schemes (SIPS).

305 A Remedial Action Scheme consists of one or more stages that can trigger and execute a
306 protection action.

307 Table 10 shows all attributes of RemedialActionScheme.

308 **Table 10 – Attributes of SteadyStateInstructionProfile::RemedialActionScheme**

name	mult	type	description
armed	1..1	Boolean	(NC) Defines the arming status of the remedial action scheme. It is set by operation or by signal.
inService	1..1	Boolean	(NC) Specifies the availability of the Remedial Action Scheme (RAS). If true, the RAS is available for contingency processing. If false, the RAS is treated by contingency processing as if it is not in the model.

309

310 **3.12 (NC) StageTrigger root class**

311 Condition that is triggered either by TriggerCondition or by gate condition within a stage and
312 has remedial action-s.

313 Table 11 shows all attributes of StageTrigger.

314 **Table 11 – Attributes of SteadyStateInstructionProfile::StageTrigger**

name	mult	type	description
armed	1..1	Boolean	(NC) The status of the class set by operation or by signal. Optional field that will override other status fields.

315

316 **3.13 UnitMultiplier enumeration**

317 The unit multipliers defined for the CIM. When applied to unit symbols, the unit symbol is
318 treated as a derived unit. Regardless of the contents of the unit symbol text, the unit symbol
319 shall be treated as if it were a single-character unit symbol. Unit symbols should not contain
320 multipliers, and it should be left to the multiplier to define the multiple for an entire data type.

321 For example, if a unit symbol is "m2Pers" and the multiplier is "k", then the value is $k(m^{**2}/s)$,
322 and the multiplier applies to the entire final value, not to any individual part of the value. This
323 can be conceptualized by substituting a derived unit symbol for the unit type. If one imagines
324 that the symbol "P" represents the derived unit "m2Pers", then applying the multiplier "k" can
325 be conceptualized simply as "kP".

326 For example, the SI unit for mass is "kg" and not "g". If the unit symbol is defined as "kg", then
327 the multiplier is applied to "kg" as a whole and does not replace the "k" in front of the "g". In
328 this case, the multiplier of "m" would be used with the unit symbol of "kg" to represent one gram.
329 As a text string, this violates the instructions in IEC 80000-1. However, because the unit symbol
330 in CIM is treated as a derived unit instead of as an SI unit, it makes more sense to conceptualize

331 the "kg" as if it were replaced by one of the proposed replacements for the SI mass symbol. If
 332 one imagines that the "kg" were replaced by a symbol "P", then it is easier to conceptualize the
 333 multiplier "m" as creating the proper unit "mP", and not the forbidden unit "mkg".
 334 Table 12 shows all literals of UnitMultiplier.

335 **Table 12 – Literals of SteadyStateInstructionProfile::UnitMultiplier**

literal	value	description
y	-24	Yocto 10**-24.
z	-21	Zepto 10**-21.
a	-18	Atto 10**-18.
f	-15	Femto 10**-15.
p	-12	Pico 10**-12.
n	-9	Nano 10**-9.
micro	-6	Micro 10**-6.
m	-3	Milli 10**-3.
c	-2	Centi 10**-2.
d	-1	Deci 10**-1.
none	0	No multiplier or equivalently multiply by 1.
da	1	Deca 10**1.
h	2	Hecto 10**2.
k	3	Kilo 10**3.
M	6	Mega 10**6.
G	9	Giga 10**9.
T	12	Tera 10**12.
P	15	Peta 10**15.
E	18	Exa 10**18.
Z	21	Zetta 10**21.
Y	24	Yotta 10**24.

336

337 3.14 UnitSymbol enumeration

338 The derived units defined for usage in the CIM. In some cases, the derived unit is equal to an
 339 SI unit. Whenever possible, the standard derived symbol is used instead of the formula for the
 340 derived unit. For example, the unit symbol Farad is defined as "F" instead of "CPerV". In cases
 341 where a standard symbol does not exist for a derived unit, the formula for the unit is used as
 342 the unit symbol. For example, density does not have a standard symbol and so it is represented
 343 as "kgPerm3". With the exception of the "kg", which is an SI unit, the unit symbols do not contain
 344 multipliers and therefore represent the base derived unit to which a multiplier can be applied as
 345 a whole.

346 Every unit symbol is treated as an unparseable text as if it were a single-letter symbol. The
 347 meaning of each unit symbol is defined by the accompanying descriptive text and not by the
 348 text contents of the unit symbol.

349 To allow the widest possible range of serializations without requiring special character handling,
 350 several substitutions are made which deviate from the format described in IEC 80000-1. The
 351 division symbol "/" is replaced by the letters "Per". Exponents are written in plain text after the
 352 unit as "m3" instead of being formatted as "m" with a superscript of 3 or introducing a symbol
 353 as in "m^3". The degree symbol "°" is replaced with the letters "deg". Any clarification of the
 354 meaning for a substitution is included in the description for the unit symbol.

355 Non-SI units are included in list of unit symbols to allow sources of data to be correctly labelled
 356 with their non-SI units (for example, a GPS sensor that is reporting numbers that represent feet
 357 instead of meters). This allows software to use the unit symbol information correctly convert
 358 and scale the raw data of those sources into SI-based units.
 359 The integer values are used for harmonization with IEC 61850.
 360 Table 13 shows all literals of UnitSymbol.

361 **Table 13 – Literals of SteadyStateInstructionProfile::UnitSymbol**

literal	value	description
none	0	Dimension less quantity, e.g. count, per unit, etc.
m	2	Length in metres.
kg	3	Mass in kilograms. Note: multiplier “k” is included in this unit symbol for compatibility with IEC 61850-7-3.
s	4	Time in seconds.
A	5	Current in amperes.
K	6	Temperature in kelvins.
mol	7	Amount of substance in moles.
cd	8	Luminous intensity in candelas.
deg	9	Plane angle in degrees.
rad	10	Plane angle in radians (m/m).
sr	11	Solid angle in steradians (m ² /m ²).
Gy	21	Absorbed dose in grays (J/kg).
Bq	22	Radioactivity in becquerels (1/s).
degC	23	Relative temperature in degrees Celsius. In the SI unit system the symbol is °C. Electric charge is measured in coulomb that has the unit symbol C. To distinguish degree Celsius from coulomb the symbol used in the UML is degC. The reason for not using °C is that the special character ° is difficult to manage in software.
Sv	24	Dose equivalent in sieverts (J/kg).
F	25	Electric capacitance in farads (C/V).
C	26	Electric charge in coulombs (A·s).
S	27	Conductance in siemens.
H	28	Electric inductance in henrys (Wb/A).
V	29	Electric potential in volts (W/A).
ohm	30	Electric resistance in ohms (V/A).
J	31	Energy in joules (N·m = C·V = W·s).
N	32	Force in newtons (kg·m/s ²).
Hz	33	Frequency in hertz (1/s).
lx	34	Illuminance in lux (lm/m ²).
lm	35	Luminous flux in lumens (cd·sr).
Wb	36	Magnetic flux in webers (V·s).
T	37	Magnetic flux density in teslas (Wb/m ²).
W	38	Real power in watts (J/s). Electrical power may have real and reactive components. The real portion of electrical power (I^2R or $VI\cos(\phi)$), is

literal	value	description
		expressed in Watts. See also apparent power and reactive power.
Pa	39	Pressure in pascals (N/m ²). Note: the absolute or relative measurement of pressure is implied with this entry. See below for more explicit forms.
m2	41	Area in square metres (m ²).
m3	42	Volume in cubic metres (m ³).
mPers	43	Velocity in metres per second (m/s).
mPers2	44	Acceleration in metres per second squared (m/s ²).
m3Pers	45	Volumetric flow rate in cubic metres per second (m ³ /s).
mPerm3	46	Fuel efficiency in metres per cubic metres (m/m ³).
kgm	47	Moment of mass in kilogram metres (kg·m) (first moment of mass). Note: multiplier "k" is included in this unit symbol for compatibility with IEC 61850-7-3.
kgPerm3	48	Density in kilogram/cubic metres (kg/m ³). Note: multiplier "k" is included in this unit symbol for compatibility with IEC 61850-7-3.
m2Pers	49	Viscosity in square metres / second (m ² /s).
WPermK	50	Thermal conductivity in watt/metres kelvin.
JPerK	51	Heat capacity in joules/kelvin.
ppm	52	Concentration in parts per million.
rotPers	53	Rotations per second (1/s). See also Hz (1/s).
radPers	54	Angular velocity in radians per second (rad/s).
WPerm2	55	Heat flux density, irradiance, watts per square metre.
JPerm2	56	Insulation energy density, joules per square metre or watt second per square metre.
SPerm	57	Conductance per length (F/m).
KPers	58	Temperature change rate in kelvins per second.
PaPers	59	Pressure change rate in pascals per second.
JPerkgK	60	Specific heat capacity, specific entropy, joules per kilogram Kelvin.
VA	61	Apparent power in volt amperes. See also real power and reactive power.
VAr	63	Reactive power in volt amperes reactive. The "reactive" or "imaginary" component of electrical power (VIsin(phi)). (See also real power and apparent power). Note: Different meter designs use different methods to arrive at their results. Some meters may compute reactive power as an arithmetic value, while others compute the value vectorially. The data consumer should determine the method in use and the suitability of the measurement for the intended purpose.
cosPhi	65	Power factor, dimensionless.

literal	value	description
		Note 1: This definition of power factor only holds for balanced systems. See the alternative definition under code 153. Note 2 : Beware of differing sign conventions in use between the IEC and EEl. It is assumed that the data consumer understands the type of meter in use and the sign convention in use by the utility.
Vs	66	Volt seconds (Ws/A).
V2	67	Volt squared (W^2/A^2).
As	68	Ampere seconds (A·s).
A2	69	Amperes squared (A^2).
A2s	70	Ampere squared time in square amperes (A^2s).
VAh	71	Apparent energy in volt ampere hours.
Wh	72	Real energy in watt hours.
VArh	73	Reactive energy in volt ampere reactive hours.
VPerHz	74	Magnetic flux in volt per hertz.
HzPers	75	Rate of change of frequency in hertz per second.
character	76	Number of characters.
charPers	77	Data rate (baud) in characters per second.
kgm2	78	Moment of mass in kilogram square metres ($kg \cdot m^2$) (Second moment of mass, commonly called the moment of inertia). Note: multiplier "k" is included in this unit symbol for compatibility with IEC 61850-7-3.
dB	79	Sound pressure level in decibels. Note: multiplier "d" is included in this unit symbol for compatibility with IEC 61850-7-3.
WPers	81	Ramp rate in watts per second.
IPers	82	Volumetric flow rate in litres per second.
dBm	83	Power level (logarithmic ratio of signal strength , Bel-mW), normalized to 1mW. Note: multiplier "d" is included in this unit symbol for compatibility with IEC 61850-7-3.
h	84	Time in hours, hour = 60 min = 3600 s.
min	85	Time in minutes, minute = 60 s.
Q	100	Quantity power, Q.
Qh	101	Quantity energy, Qh.
ohmm	102	Resistivity, ohm metres, (ρ).
APerm	103	A/m, magnetic field strength, amperes per metre.
V2h	104	Volt-squared hour, volt-squared-hours.
A2h	105	Ampere-squared hour, ampere-squared hour.
Ah	106	Ampere-hours, ampere-hours.
count	111	Amount of substance, Counter value.
ft3	119	Volume, cubic feet.
m3Perh	125	Volumetric flow rate, cubic metres per hour.
gal	128	Volume in gallons, US gallon (1 gal = 231 in ³ = 128 fl ounce).

literal	value	description
Btu	132	Energy, British Thermal Units.
l	134	Volume in litres, litre = dm ³ = m ³ /1000.
lPerh	137	Volumetric flow rate, litres per hour.
lPerl	143	Concentration, The ratio of the volume of a solute divided by the volume of the solution. Note: Users may need use a prefix such a 'µ' to express a quantity such as 'µL/L'.
gPerg	144	Concentration, The ratio of the mass of a solute divided by the mass of the solution. Note: Users may need use a prefix such a 'µ' to express a quantity such as 'µg/g'.
molPerm3	145	Concentration, The amount of substance concentration, (c), the amount of solvent in moles divided by the volume of solution in m ³ .
molPermol	146	Concentration, Molar fraction, the ratio of the molar amount of a solute divided by the molar amount of the solution.
molPerkg	147	Concentration, Molality, the amount of solute in moles and the amount of solvent in kilograms.
sPers	149	Time, Ratio of time. Note: Users may need to supply a prefix such as 'µ' to show rates such as 'µs/s'.
HzPerHz	150	Frequency, rate of frequency change. Note: Users may need to supply a prefix such as 'm' to show rates such as 'mHz/Hz'.
VPerV	151	Voltage, ratio of voltages. Note: Users may need to supply a prefix such as 'm' to show rates such as 'mV/V'.
APerA	152	Current, ratio of amperages. Note: Users may need to supply a prefix such as 'm' to show rates such as 'mA/A'.
VPerVA	153	Power factor, PF, the ratio of the active power to the apparent power. Note: The sign convention used for power factor will differ between IEC meters and EEI (ANSI) meters. It is assumed that the data consumers understand the type of meter being used and agree on the sign convention in use at any given utility.
rev	154	Amount of rotation, revolutions.
kat	158	Catalytic activity, katal = mol / s.
JPerkg	165	Specific energy, Joules / kg.
m3Uncompensated	166	Volume, cubic metres, with the value uncompensated for weather effects.
m3Compensated	167	Volume, cubic metres, with the value compensated for weather effects.
WPerW	168	Signal Strength, ratio of power. Note: Users may need to supply a prefix such as 'm' to show rates such as 'mW/W'.
therm	169	Energy, therms.
onePerm	173	Wavenumber, reciprocal metres, (1/m).
m3Perkg	174	Specific volume, cubic metres per kilogram, v.
Pas	175	Dynamic viscosity, pascal seconds.
Nm	176	Moment of force, newton metres.

literal	value	description
NPerm	177	Surface tension, newton per metre.
radPers2	178	Angular acceleration, radians per second squared.
JPerm3	181	Energy density, joules per cubic metre.
VPerm	182	Electric field strength, volts per metre.
CPerm3	183	Electric charge density, coulombs per cubic metre.
CPerm2	184	Surface charge density, coulombs per square metre.
FPerm	185	Permittivity, farads per metre.
HPerm	186	Permeability, henrys per metre.
JPermol	187	Molar energy, joules per mole.
JPermolK	188	Molar entropy, molar heat capacity, joules per mole kelvin.
CPerkg	189	Exposure (x rays), coulombs per kilogram.
GyPers	190	Absorbed dose rate, grays per second.
WPersr	191	Radiant intensity, watts per steradian.
WPerm2sr	192	Radiance, watts per square metre steradian.
katPerm3	193	Catalytic activity concentration, katals per cubic metre.
d	195	Time in days, day = 24 h = 86400 s.
anglemin	196	Plane angle, minutes.
anglesec	197	Plane angle, seconds.
ha	198	Area, hectares.
tonne	199	Mass in tons, "tonne" or "metric ton" (1000 kg = 1 Mg).
bar	214	Pressure in bars, (1 bar = 100 kPa).
mmHg	215	Pressure, millimetres of mercury (1 mmHg is approximately 133.3 Pa).
M	217	Length, nautical miles (1 M = 1852 m).
kn	219	Speed, knots (1 kn = 1852/3600) m/s.
Mx	276	Magnetic flux, maxwells (1 Mx = 10 ⁻⁸ Wb).
G	277	Magnetic flux density, gaussses (1 G = 10 ⁻⁴ T).
Oe	278	Magnetic field in oersteds, (1 Oe = (103/4 π) A/m).
Vh	280	Volt-hour, Volt hours.
WPerA		Active power per current flow, watts per Ampere.
onePerHz		Reciprocal of frequency (1/Hz).
VPerVAr		Power factor, PF, the ratio of the active power to the apparent power. Note: The sign convention used for power factor will differ between IEC meters and EEI (ANSI) meters. It is assumed that the data consumers understand the type of meter being used and agree on the sign convention in use at any given utility.
ohmPerm	86	Electric resistance per length in ohms per metre ((V/A)/m).

literal	value	description
kgPerJ		Weight per energy in kilograms per joule (kg/J). Note: multiplier "k" is included in this unit symbol for compatibility with IEC 61850-7-3.
JPers		Energy rate in joules per second (J/s).

362

363 **3.15 PerCent datatype**

364 Percentage on a defined base. For example, specify as 100 to indicate at the defined base.
365 Table 14 shows all attributes of PerCent.

366

Table 14 – Attributes of SteadyStateInstructionProfile::PerCent

name	mult	type	description
value	0..1	Float	Normally 0 to 100 on a defined base.
unit	0..1	UnitSymbol	(const=none)
multiplier	0..1	UnitMultiplier	(const=none)

367

368 **3.16 ActivePower datatype**

369 Product of RMS value of the voltage and the RMS value of the in-phase component of the
370 current.

371 Table 15 shows all attributes of ActivePower.

372

Table 15 – Attributes of SteadyStateInstructionProfile::ActivePower

name	mult	type	description
multiplier	0..1	UnitMultiplier	
unit	0..1	UnitSymbol	(const=W)
value	0..1	Float	

373

374 **3.17 String primitive**

375 A string consisting of a sequence of characters. The character encoding is UTF-8. The string
376 length is unspecified and unlimited.

377 **3.18 Date primitive**

378 Date as "yyyy-mm-dd", which conforms with ISO 8601. UTC time zone is specified as "yyyy-
379 mm-ddZ". A local timezone relative UTC is specified as "yyyy-mm-dd(+/-)hh:mm".

380 **3.19 DateTime primitive**

381 Date and time as "yyyy-mm-ddThh:mm:ss.sss", which conforms with ISO 8601. UTC time zone
382 is specified as "yyyy-mm-ddThh:mm:ss.sssZ". A local timezone relative UTC is specified as
383 "yyyy-mm-ddThh:mm:ss.sss-hh:mm". The second component (shown here as "ss.sss") could
384 have any number of digits in its fractional part to allow any kind of precision beyond seconds.

385 **3.20 Float primitive**

386 A floating point number. The range is unspecified and not limited.

387 **3.21 Duration primitive**

388 Duration as "PnYnMnDTnHnMnS" which conforms to ISO 8601, where nY expresses a number
389 of years, nM a number of months, nD a number of days. The letter T separates the date
390 expression from the time expression and, after it, nH identifies a number of hours, nM a number
391 of minutes and nS a number of seconds. The number of seconds could be expressed as a
392 decimal number, but all other numbers are integers.

393 **3.22 Boolean primitive**

394 A type with the value space "true" and "false".

395

396

397

Annex A (informative): Sample data

A.1 General

399 This Annex is designed to illustrate the profile by using fragments of sample data. It is not meant
400 to be a complete set of examples covering all possibilities of using the profile. Defining a
401 complete set of test data is considered a separate activity to be performed for the purpose of
402 setting up interoperability testing and conformity related to this profile.

A.2 Sample instance data

404 Intentionally left blank. Sample data will be produced at later stage.

405

406