



European Network of  
Transmission System Operators  
for Electricity

---

# SECURITY ANALYSIS RESULT PROFILE SPECIFICATION

---

2024-10-16

---

ICTC APPROVED  
VERSION 2.4.0

1 Copyright notice:

2 **Copyright © ENTSO-E. All Rights Reserved.**

3 This document and its whole translations may be copied and furnished to others, and derivative  
4 works that comment on or otherwise explain it or assist in its implementation may be prepared,  
5 copied, published and distributed, in whole or in part, without restriction of any kind, provided  
6 that the above copyright notice and this paragraph are included on all such copies and  
7 derivative works. However, this document itself may not be modified in any way, except for  
8 literal and whole translation into languages other than English and under all circumstances, the  
9 copyright notice or references to ENTSO-E may not be removed.

10 This document and the information contained herein is provided on an "as is" basis.

11 **ENTSO-E DISCLAIMS ALL WARRANTIES, EXPRESS OR IMPLIED, INCLUDING BUT NOT**  
12 **LIMITED TO ANY WARRANTY THAT THE USE OF THE INFORMATION HEREIN WILL NOT**  
13 **INFRINGE ANY RIGHTS OR ANY IMPLIED WARRANTIES OF MERCHANTABILITY OR**  
14 **FITNESS FOR A PARTICULAR PURPOSE.**

15 **This document is maintained by the ENTSO-E CIM WG. Comments or remarks are to be**  
16 **provided at [cim@entsoe.eu](mailto:cim@entsoe.eu)**

17 **NOTE CONCERNING WORDING USED IN THIS DOCUMENT**

18 The force of the following words is modified by the requirement level of the document in which  
19 they are used.

- 20 • **SHALL:** This word, or the terms "REQUIRED" or "MUST", means that the definition is an  
21 absolute requirement of the specification.
- 22 • **SHALL NOT:** This phrase, or the phrase "MUST NOT", means that the definition is an  
23 absolute prohibition of the specification.
- 24 • **SHOULD:** This word, or the adjective "RECOMMENDED", means that there may exist valid  
25 reasons in particular circumstances to ignore a particular item, but the full implications must  
26 be understood and carefully weighed before choosing a different course.
- 27 • **SHOULD NOT:** This phrase, or the phrase "NOT RECOMMENDED", means that there may  
28 exist valid reasons in particular circumstances when the particular behaviour is acceptable  
29 or even useful, but the full implications should be understood and the case carefully weighed  
30 before implementing any behaviour described with this label.
- 31 • **MAY:** This word, or the adjective "OPTIONAL", means that an item is truly optional.

32

## Revision History

Version	Date	Paragraph	Comments
1.0.0	2021-03-22		Document for SOC approval
2.0.0	2021-10-12		For CIM EG review. No major update. Due to modification of the extensions some elements may have different descriptions.
2.0.0	2022-02-16		SOC approved.
2.1.0	2022-09-21		SOC approved.
2.2.0	2023-03-24		For review.
2.2.0	2023-04-20		For ICTC approval.
2.3.0-alpha	2024-03-20		For CIM WG review.
2.4.0-alpha	2024-09-07		For CIM WG review.

34	<b>CONTENTS</b>		
35	Copyright notice:.....		2
36	Revision History.....		3
37	CONTENTS .....		4
38	1 Introduction .....		6
39	2 Application profile specification .....		6
40	2.1 Version information .....		6
41	2.2 Constraints naming convention .....		6
42	2.3 Profile constraints .....		7
43	2.4 Metadata.....		11
44	2.4.1 Constraints .....		11
45	2.4.2 Reference metadata .....		11
46	3 Detailed Profile Specification .....		11
47	3.1 General.....		11
48	3.2 (NC) BaseCasePowerFlowResult .....		12
49	3.3 (NC) ContingencyPowerFlowResult.....		13
50	3.4 (abstract) Contingency root class .....		13
51	3.5 (abstract,NC) PowerFlowResult root class .....		13
52	3.6 (abstract) OperationalLimit root class.....		14
53	3.7 (abstract,NC) Region root class .....		15
54	3.8 UnitMultiplier enumeration .....		15
55	3.9 UnitSymbol enumeration .....		15
56	3.10 PerCent datatype .....		16
57	3.11 DateTime primitive .....		16
58	3.12 Float primitive .....		16
59	3.13 String primitive.....		16
60	3.14 Boolean primitive .....		17
61	3.15 ActivePower datatype .....		17
62	3.16 ApparentPower datatype.....		17
63	3.17 Voltage datatype.....		17
64	3.18 AngleDegrees datatype.....		17
65	3.19 CurrentFlow datatype.....		18
66	3.20 ReactivePower datatype .....		18
67	3.21 (abstract) ACDCTerminal root class .....		18
68	3.22 (NC) RemedialActionApplied root class .....		18
69	3.23 (abstract,NC) RemedialAction root class .....		19
70	3.24 (NC) Stage root class.....		19
71	Annex A (informative): Sample data .....		20
72	A.1 General.....		20
73	A.2 Sample instance data.....		20
74			
75	<b>List of figures</b>		
76	Figure 1 – Class diagram SecurityAnalysisResultProfile::SecurityAnalysisResultProfile .....		12

77

78 **List of tables**

79	Table 1 – Attributes of SecurityAnalysisResultProfile::BaseCasePowerFlowResult .....	12
80	Table 2 – Association ends of	
81	SecurityAnalysisResultProfile::BaseCasePowerFlowResult with other classes .....	13
82	Table 3 – Attributes of SecurityAnalysisResultProfile::ContingencyPowerFlowResult .....	13
83	Table 4 – Association ends of	
84	SecurityAnalysisResultProfile::ContingencyPowerFlowResult with other classes .....	13
85	Table 5 – Attributes of SecurityAnalysisResultProfile::PowerFlowResult .....	14
86	Table 6 – Association ends of SecurityAnalysisResultProfile::PowerFlowResult with	
87	other classes .....	14
88	Table 7 – Literals of SecurityAnalysisResultProfile::UnitMultiplier .....	15
89	Table 8 – Literals of SecurityAnalysisResultProfile::UnitSymbol .....	16
90	Table 9 – Attributes of SecurityAnalysisResultProfile::PerCent .....	16
91	Table 10 – Attributes of SecurityAnalysisResultProfile::ActivePower .....	17
92	Table 11 – Attributes of SecurityAnalysisResultProfile::ApparentPower .....	17
93	Table 12 – Attributes of SecurityAnalysisResultProfile::Voltage .....	17
94	Table 13 – Attributes of SecurityAnalysisResultProfile::AngleDegrees .....	17
95	Table 14 – Attributes of SecurityAnalysisResultProfile::CurrentFlow .....	18
96	Table 15 – Attributes of SecurityAnalysisResultProfile::ReactivePower .....	18
97	Table 16 – Attributes of SecurityAnalysisResultProfile::RemedialActionApplied .....	18
98	Table 17 – Association ends of SecurityAnalysisResultProfile::RemedialActionApplied	
99	with other classes .....	19

100

## 101 1 Introduction

102 The security analysis result profile is a profile to exchange a security analysis result.

103 The security analysis result is output data for security analysis.

104 The security analysis result includes each limit violation detected for each assessed element  
105 and for a given contingency. The limit violation has a direct association to operational limit and  
106 contingency. The association to the operational limit provides information on the following:

- 107 - The terminal (the end of the equipment) where the limit is defined
- 108 - The equipment to which the limit is related
- 109 - The type of the limit e.g. PATL, TATL, etc including the relevant time phase and other  
110 conditions

111 The association to the contingency provides information which contingency was simulated when  
112 this limit violation was detected.

## 113 2 Application profile specification

### 114 2.1 Version information

115 The content is generated from UML model file CIM17-2\_CGMES31v01\_PROF-  
116 20v02\_NC23v65\_MS10v01\_DES10v01.eap.

117 This edition is based on the IEC 61970 UML version 'IEC61970CIM17v40', dated '2020-08-24'.

- 118 - Title: Security Analysis Result Vocabulary
- 119 - Keyword: SAR
- 120 - Description: This vocabulary is describing the security analysis result profile.
- 121 - Version IRI: <https://ap-voc.cim4.eu/SecurityAnalysisResult/2.4>
- 122 - Version info: 2.4
- 123 - Prior version: <https://ap-voc.cim4.eu/SecurityAnalysisResult/2.3>
- 124 - Conforms to: urn:iso:std:iec:61970-600-2:ed-1|urn:iso:std:iec:61970-301:ed-  
125 7:amd1|file://iec61970cim17v40\_iec61968cim13v13a\_iec62325cim03v17a.eap|urn:iso:  
126 std:iec:61970-401:draft:ed-1|urn:iso:std:iec:61970-501:draft:ed-  
127 2|file://CIM100\_CGMES31v01\_501-20v02\_NC23v62\_MM10v01.eap
- 128 - Identifier: urn:uuid:7d53a1b2-0dcc-4556-b868-6ed099bd9ac9

129

### 130 2.2 Constraints naming convention

131 The naming of the rules shall not be used for machine processing. The rule names are just a  
132 string. The naming convention of the constraints is as follows.

133 "{rule.Type}:{rule.Standard}:{rule.Profile}:{rule.Property}:{rule.Name}"

134 where

135 rule.Type: C – for constraint; R – for requirement

136 rule.Standard: the number of the standard e.g. 301 for 61970-301, 456 for 61970-456, 13 for  
137 61968-13. 61970-600 specific constraints refer to 600 although they are related to one or  
138 combination of the 61970-450 series profiles. For NC profiles, NC is used.

139 rule.Profile: the abbreviation of the profile, e.g. TP for Topology profile. If set to "ALL" the  
140 constraint is applicable to all IEC 61970-600 profiles.

141 rule.Property: for UML classes, the name of the class, for attributes and associations, the name  
142 of the class and attribute or association end, e.g. EnergyConsumer, IdentifiedObject.name, etc.  
143 If set to "NA" the property is not applicable to a specific UML element.

144 rule.Name: the name of the rule. It is unique for the same property.

145 Example: C:600:ALL:IdentifiedObject.name:stringLength

### 146 2.3 Profile constraints

147 This clause defines requirements and constraints that shall be fulfilled by applications that  
148 conform to this document.

149 This document is the master for rules and constraints tagged "NC". For the sake of self-  
150 containment, the list below also includes a copy of the relevant rules from IEC 61970-452,  
151 tagged "452".

- 152 • C:452:ALL:NA:datatypes

153 According to 61970-501, datatypes are not exchanged in the instance data. The  
154 UnitMultiplier is 1 in cases none value is specified in the profile.

- 155 • R:452:ALL:NA:exchange

156 Optional and required attributes and associations must be imported and exported if they  
157 are in the model file prior to import.

- 158 • R:452:ALL:NA:exchange1

159 If an optional attribute does not exist in the imported file, it does not have to be exported  
160 in case exactly the same data set is exported, i.e. the tool is not obliged to automatically  
161 provide this attribute. If the export is resulting from an action by the user performed after  
162 the import, e.g. data processing or model update the export can contain optional  
163 attributes.

- 164 • R:452:ALL:NA:exchange2

165 In most of the profiles the selection of optional and required attributes is made so as to  
166 ensure a minimum set of required attributes without which the exchange does not fulfil  
167 its basic purpose. Business processes governing different exchanges can require  
168 mandatory exchange of certain optional attributes or associations. Optional and required  
169 attributes and associations shall therefore be supported by applications which claim  
170 conformance with certain functionalities of the IEC 61970-452. This provides flexibility  
171 for the business processes to adapt to different business requirements and base the  
172 exchanges on IEC 61970-452 compliant applications.

- 173 • R:452:ALL:NA:exchange3

174 An exporter may, at his or her discretion, produce a serialization containing additional  
175 class data described by the CIM Schema but not required by this document provided  
176 these data adhere to the conventions established in Clause 5.

- 177 • R:452:ALL:NA:exchange4

178 From the standpoint of the model import used by a data recipient, the document  
179 describes a subset of the CIM that importing software shall be able to interpret in order  
180 to import exported models. Data providers are free to exceed the minimum requirements  
181 described herein as long as their resulting data files are compliant with the CIM Schema  
182 and the conventions established in Clause 5. The document, therefore, describes  
183 additional classes and class data that, although not required, exporters will, in all  
184 likelihood, choose to include in their data files. The additional classes and data are  
185 labelled as required (cardinality 1..1) or as optional (cardinality 0..1) to distinguish them  
186 from their required counterparts. Please note, however, that data importers could  
187 potentially receive data containing instances of any and all classes described by the  
188 CIM Schema.

- 189 • R:452:ALL:NA:cardinality

190 The cardinality defined in the CIM model shall be followed, unless a more restrictive  
191 cardinality is explicitly defined in this document. For instance, the cardinality on the  
192 association between VoltageLevel and BaseVoltage indicates that a VoltageLevel shall  
193 be associated with one and only one BaseVoltage, but a BaseVoltage can be associated  
194 with zero to many VoltageLevels.

- 195 • R:452:ALL:NA:associations

196 Associations between classes referenced in this document and classes not referenced  
197 here are not required regardless of cardinality.

- 198 • R:452:ALL:IdentifiedObject.name:rule

199 The attribute “name” inherited by many classes from the abstract class IdentifiedObject  
200 is not required to be unique. It must be a human readable identifier without additional  
201 embedded information that would need to be parsed. The attribute is used for purposes  
202 such as User Interface and data exchange debugging. The MRID defined in the data  
203 exchange format is the only unique and persistent identifier used for this data exchange.  
204 The attribute IdentifiedObject.name is, however, always required for CoreEquipment  
205 profile and Short Circuit profile.

- 206 • R:452:ALL:IdentifiedObject.description:rule

207 The attribute “description” inherited by many classes from the abstract class  
208 IdentifiedObject must contain human readable text without additional embedded  
209 information that would need to be parsed.

- 210 • R:452:ALL:NA:uniqueIdentifier

211 All IdentifiedObject-s shall have a persistent and globally unique identifier (Master  
212 Resource Identifier - mRID).

- 213 • R:452:ALL:NA:unitMultiplier

214 For exchange of attributes defined using CIM Data Types (ActivePower, Susceptance,  
215 etc.) a unit multiplier of 1 is used if the UnitMultiplier specified in this document is “none”.

- 216 • C:452:ALL:IdentifiedObject.name:stringLength

217 The string IdentifiedObject.name has a maximum of 128 characters.

- 218 • C:452:ALL:IdentifiedObject.description:stringLength

219 The string IdentifiedObject.description is maximum 256 characters.



- 220       • C:452:ALL:NA:float
- 221       An attribute that is defined as float (e.g. has a type Float or a type which is a Datatype  
222       with .value attribute of type Float) shall support ISO/IEC 60559:2020 for floating-point  
223       arithmetic using single precision floating point. A single precision float supports 7  
224       significant digits where the significant digits are described as an integer, or a decimal  
225       number with 6 decimal digits. Two float values are equal when the significant with 7  
226       digits are identical, e.g. 1234567 is equal 1.234567E6 and so are 1.2345678 and  
227       1.234567E0.
- 228       • R:NC:ALL:Region:reference
- 229       The reference to the Region is normally a reference to the capacity calculation region,  
230       which is identified by “Y” EIC code of the capacity calculation region.
- 231       • R:NC:ALL:SystemOperator:reference
- 232       The reference to the System Operator is normally identified by “X” EIC code of TSO.
- 233       • C:NC:SAR:PowerFlowResult:value
- 234       PowerFlowResult.value and PowerFlowResult.absoluteValue are required attributes if  
235       the association end PowerFlowResult.OperationalLimit is provided.
- 236       • C:NC:SAR:PowerFlowResult:ApparentPowerLimit
- 237       PowerFlowResult.valueVA is required attribute if an ApparentPowerLimit is referenced  
238       by the association end PowerFlowResult.OperationalLimit.
- 239       • C:NC:SAR:PowerFlowResult:ActivePowerLimit
- 240       PowerFlowResult.valueW is required attribute if an ActivePowerLimit is referenced by  
241       the association end PowerFlowResult.OperationalLimit.
- 242       • C:NC:SAR:PowerFlowResult:ReactivePowerLimit
- 243       PowerFlowResult.valueVAR is required attribute if a ReactivePowerLimit is referenced  
244       by the association end PowerFlowResult.OperationalLimit.
- 245       • C:NC:SAR:PowerFlowResult:VoltageLimit
- 246       PowerFlowResult.valueV is required attribute if a VoltageLimit is referenced by the  
247       association end PowerFlowResult.OperationalLimit.
- 248       • C:NC:SAR:PowerFlowResult:VoltageAngleLimit
- 249       PowerFlowResult.valueAngle is required attribute if a VoltageAngleLimit is referenced  
250       by the association end PowerFlowResult.OperationalLimit.
- 251       • C:NC:SAR:PowerFlowResult:CurrentLimit
- 252       PowerFlowResult.valueA is required attribute if a CurrentLimit is referenced by the  
253       association end PowerFlowResult.OperationalLimit.
- 254       • R:NC:ALL:NA:serialization
- 255       The profiles are defined in the EnterpriseArchitect application and have multiple artifacts  
256       that describe them. The main artifacts are:
- 257       1) the EAP file (EnterpriseArchitect project file),

- 258 2) the profiles' specification document and  
259 3) the application profiles (RDFS and SHACL).

260 Due to the complexity of the profiles, there are various cross profile associations that,  
261 from profiling and profile maintenance point of view, it is not practical to include the  
262 complete inheritance structure in all profiles. If this is done the documentation provided  
263 for all profiles would also include duplicated information on the description of classes  
264 defined in other profiles. The following cases are often observed in profiles:

- 265 ○ Case 1: An association end refers to an abstract class
- 266 ○ Case 2: An abstract class (stereotyped with "Description") has an association  
267 (direction to another class)
- 268 ○ Case 3: An abstract class (not stereotyped with "Description") has an  
269 association (direction to another class)
- 270 ○ Case 4: An abstract class has attributes and subclasses are not in the profile

271 In all cases, the datasets shall only include the subtypes of the abstract classes with  
272 the related properties (i.e. association or attributes) defined in the profile. The  
273 information is taken from either canonical model or the profiles where complete  
274 (expected) inheritance structure for the related abstract class is described. SHACL  
275 based constraints include constraints only for the concrete classes that are subtypes of  
276 the abstract class in the profile, and this can be used to inform which are the concrete  
277 classes expected in a dataset that conforms to this profile.

278 It should be taken into account that this approach deviates from MVAL5 (IEC 61970-  
279 600-1:2021), which creates multiple inheritance at serialization. For instance, with this  
280 more explicit exchange the serialization of the association between abstract class  
281 Equipment and abstract class Circuit for a PowerTransformer will be serialized as  
282 follows:

- 283 ○ for association
- 284 

```
<cim:PowerTransformer rdf:about="_c328f787-bc17-47ad-a59f-6ba7133340d0">
```
- 285 

```
<nc:Equipment.Circuit rdf:resource="#_9ced16ac-d076-4ef9-a241-a998a579e77b"/>
```
- 286 

```
</cim:PowerTransformer>
```
- 287 ○ for attribute
- 288 

```
<cim:ACLineSegment rdf:about="_04f681aa-6999-4fb3-9775-aca5eb7ceff">
```
- 289 

```
<cim:Equipment.inService>true</cim:Equipment.inService>
```
- 290 

```
</cim:ACLineSegment>
```

291 The usage of rdf:ID or rdf:about depends on the stereotype of the class. rdf:about is  
292 used if the class has the stereotype "Description".

293 An example of not allowed serialization, as the Equipment is an abstract class

```
294 <cim:Equipment rdf:about="_c328f787-bc17-47ad-a59f-6ba7133340d0">
```

```
295 <nc:Equipment.Circuit rdf:resource="#_9ced16ac-d076-4ef9-a241-a998a579e77b"/>
```

```
296 </cim:Equipment>
```

- 297 • C:NC:SAR:RemedialActionApplied.StageForRemedialActionScheme:cardinality

298 The association end RemedialActionApplied.StageForRemedialActionScheme is  
299 required if RemedialActionApplied.RemedialAction references SchemeRemedialAction  
300 and it is not provided for any other RemedialAction objects.

301

## 302 2.4 Metadata

303 ENTSO-E agreed to extend the header and metadata definitions by IEC 61970-552 Ed2. This  
304 new header definitions rely on W3C recommendations which are used worldwide and are  
305 positively recognised by the European Commission. The new definitions of the header mainly  
306 use Provenance ontology (PROV-O), Time Ontology and Data Catalog Vocabulary (DCAT). The  
307 global new header applicable for this profile is included in the metadata and document header  
308 specification document.

309 The header vocabulary contains all attributes defined in IEC 61970-552. This is done only for  
310 the purpose of having one vocabulary for header and to ensure transition for data exchanges  
311 that are using IEC 61970-552:2016 header. This profile does not use IEC 61970-552:2016  
312 header attributes and relies only on the extended attributes.

### 313 2.4.1 Constraints

314 The identification of the constraints related to the metadata follows the same convention for  
315 naming of the constraints as for profile constraints.

- 316 • R:NC:ALL:wasAttributedTo:usage

317 The prov:wasAttributedTo should normally be the “X” EIC code of the actor or their URI  
318 (prov:Agent).

319

### 320 2.4.2 Reference metadata

321 The header defined for this profile requires availability of a set of reference metadata. For  
322 instance, the attribute prov:wasGeneratedBy requires a reference to an activity which produced  
323 the model or the related process. The activities are defined as reference metadata and their  
324 identifiers are referenced from the header to enable the receiving entity to retrieve the “static”  
325 (reference) information that is not modified frequently. This approach imposes a requirement  
326 that both the sending entity and the receiving entity have access to a unique version of the  
327 reference metadata. Therefore, each business process shall define which reference metadata  
328 is used and where it is located.

## 329 3 Detailed Profile Specification


### 330 3.1 General

331 This package contains the security analysis result profile.

332 This profile is not intended to replace the Topology (TP) and State Variables (SV) profiles. Its  
333 intention is to exchange power flow result that is relevant for security optimization, either  
334 through violation or through a loading threshold. Systems should not use this profile for dumping  
335 a full database. The modeling is optimized to have the minimum size in addition to a well defined  
336 value definition (e.g. active power, apparent power, etc.).

337 Recommendation: If the terminals are connected with zero impedance, it is recommended to  
338 export only one terminal with a voltage (e.g. the terminal of a BusbarSection).

339 The connection between Contingency and Remedial Action is given by the Remedial Action  
340 Profile. The connection between AssessedElement and PowerFlowResult is given by the  
341 OperationalLimit.

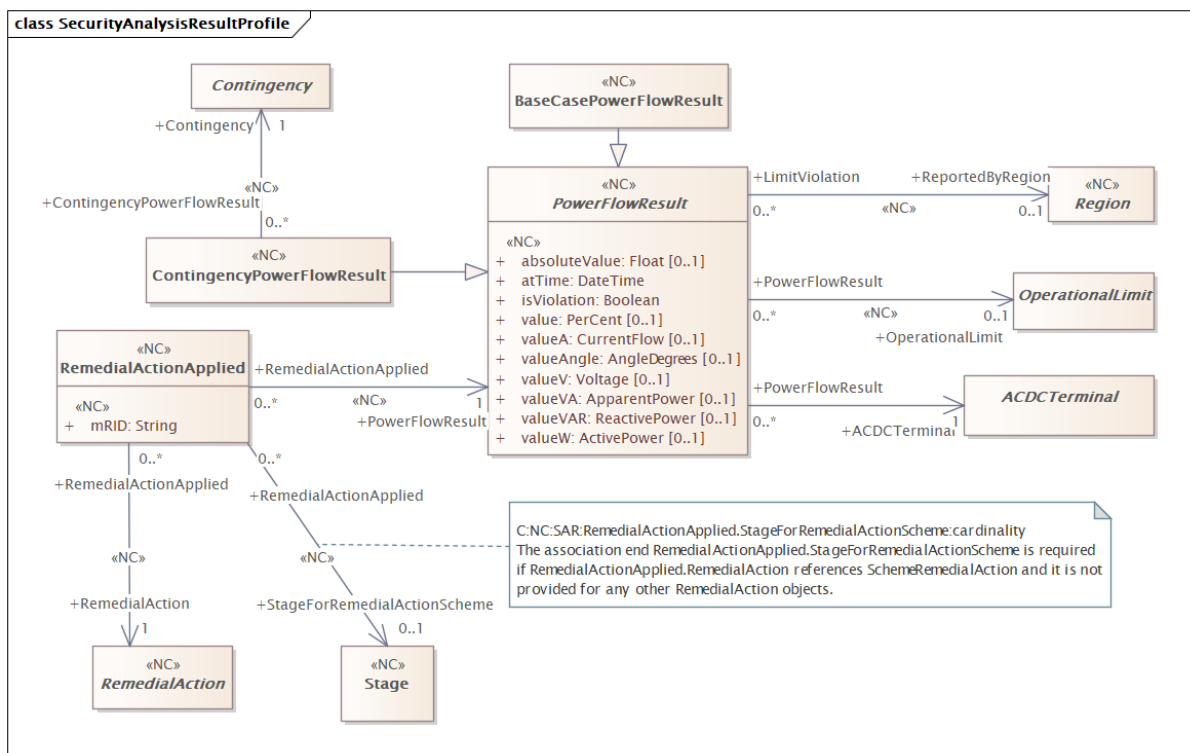

342  
343 **Figure 1 – Class diagram SecurityAnalysisResultProfile::SecurityAnalysisResultProfile**

344 Figure 1: The diagram contains the main classes used in the profile.

345 **3.2 (NC) BaseCasePowerFlowResult**

346 Inheritance path = [PowerFlowResult](#)

347 Base case power flow result for a given terminal.

348 Table 1 shows all attributes of BaseCasePowerFlowResult.

349 **Table 1 – Attributes of SecurityAnalysisResultProfile::BaseCasePowerFlowResult**

name	mult	type	description
value	0..1	<a href="#">PerCent</a>	(NC) inherited from: <a href="#">PowerFlowResult</a>
absoluteValue	0..1	<a href="#">Float</a>	(NC) inherited from: <a href="#">PowerFlowResult</a>
atTime	1..1	<a href="#">DateTime</a>	(NC) inherited from: <a href="#">PowerFlowResult</a>
isViolation	1..1	<a href="#">Boolean</a>	(NC) inherited from: <a href="#">PowerFlowResult</a>
valueW	0..1	<a href="#">ActivePower</a>	(NC) inherited from: <a href="#">PowerFlowResult</a>
valueVA	0..1	<a href="#">ApparentPower</a>	(NC) inherited from: <a href="#">PowerFlowResult</a>
valueV	0..1	<a href="#">Voltage</a>	(NC) inherited from: <a href="#">PowerFlowResult</a>
valueAngle	0..1	<a href="#">AngleDegrees</a>	(NC) inherited from: <a href="#">PowerFlowResult</a>
valueA	0..1	<a href="#">CurrentFlow</a>	(NC) inherited from: <a href="#">PowerFlowResult</a>
valueVAR	0..1	<a href="#">ReactivePower</a>	(NC) inherited from: <a href="#">PowerFlowResult</a>

350  
351 Table 2 shows all association ends of BaseCasePowerFlowResult with other classes.

352  
353**Table 2 – Association ends of  
SecurityAnalysisResultProfile::BaseCasePowerFlowResult with other classes**

mult from	name	mult to	type	description
0..*	ReportedByRegion	0..1	<a href="#">Region</a>	(NC) inherited from: <a href="#">PowerFlowResult</a>
0..*	OperationalLimit	0..1	<a href="#">OperationalLimit</a>	(NC) inherited from: <a href="#">PowerFlowResult</a>
0..*	ACDCTerminal	1..1	<a href="#">ACDCTerminal</a>	inherited from: <a href="#">PowerFlowResult</a>

354

**3.3 (NC) ContingencyPowerFlowResult**356 Inheritance path = [PowerFlowResult](#)

357 Contingency power flow result on a given terminal for a given contingency.

358 Table 3 shows all attributes of ContingencyPowerFlowResult.

**Table 3 – Attributes of SecurityAnalysisResultProfile::ContingencyPowerFlowResult**

name	mult	type	description
value	0..1	<a href="#">PerCent</a>	(NC) inherited from: <a href="#">PowerFlowResult</a>
absoluteValue	0..1	<a href="#">Float</a>	(NC) inherited from: <a href="#">PowerFlowResult</a>
atTime	1..1	<a href="#">DateTime</a>	(NC) inherited from: <a href="#">PowerFlowResult</a>
isViolation	1..1	<a href="#">Boolean</a>	(NC) inherited from: <a href="#">PowerFlowResult</a>
valueW	0..1	<a href="#">ActivePower</a>	(NC) inherited from: <a href="#">PowerFlowResult</a>
valueVA	0..1	<a href="#">ApparentPower</a>	(NC) inherited from: <a href="#">PowerFlowResult</a>
valueV	0..1	<a href="#">Voltage</a>	(NC) inherited from: <a href="#">PowerFlowResult</a>
valueAngle	0..1	<a href="#">AngleDegrees</a>	(NC) inherited from: <a href="#">PowerFlowResult</a>
valueA	0..1	<a href="#">CurrentFlow</a>	(NC) inherited from: <a href="#">PowerFlowResult</a>
valueVAR	0..1	<a href="#">ReactivePower</a>	(NC) inherited from: <a href="#">PowerFlowResult</a>

360

361 Table 4 shows all association ends of ContingencyPowerFlowResult with other classes.

362

363

**Table 4 – Association ends of  
SecurityAnalysisResultProfile::ContingencyPowerFlowResult with other classes**

mult from	name	mult to	type	description
0..*	Contingency	1..1	<a href="#">Contingency</a>	(NC) The contingency that has this power flow result.
0..*	ReportedByRegion	0..1	<a href="#">Region</a>	(NC) inherited from: <a href="#">PowerFlowResult</a>
0..*	OperationalLimit	0..1	<a href="#">OperationalLimit</a>	(NC) inherited from: <a href="#">PowerFlowResult</a>
0..*	ACDCTerminal	1..1	<a href="#">ACDCTerminal</a>	inherited from: <a href="#">PowerFlowResult</a>

364

**3.4 (abstract) Contingency root class**

366 An event threatening system reliability, consisting of one or more contingency elements.

**3.5 (abstract,NC) PowerFlowResult root class**

368 Power flow result including any operational limit violation.

369 Table 5 shows all attributes of PowerFlowResult.

370

**Table 5 – Attributes of SecurityAnalysisResultProfile::PowerFlowResult**

name	mult	type	description
value	0..1	<a href="#">PerCent</a>	(NC) The value of the limit violation in percent related to the value of the operational limit that is violated. For instance, if the operational limit is 1000 A and the current flow is 1100 A the value is reported as 110 %.
absoluteValue	0..1	<a href="#">Float</a>	(NC) Absolute value from a power flow calculation on a given terminal related to a given operational limit. For instance, if the operational limit is 1000 A and the current flow is 1100 A the absoluteValue is reported as 1100 A.
atTime	1..1	<a href="#">DateTime</a>	(NC) The date and time of the scenario time that was studied and at which the limit violation occurred.
isViolation	1..1	<a href="#">Boolean</a>	(NC) True if the power flow result is violating the associated operational limit. False if it is not violating the associated operational limits.
valueW	0..1	<a href="#">ActivePower</a>	(NC) Active power value from a power flow calculation on a given terminal. Load sign convention is used, i.e. positive sign means flow out from a TopologicalNode (bus) into the conducting equipment.
valueVA	0..1	<a href="#">ApparentPower</a>	(NC) Apparent power value from a power flow calculation on a given terminal.
valueV	0..1	<a href="#">Voltage</a>	(NC) Voltage value from a power flow calculation on a given terminal. The attribute shall be a positive value.
valueAngle	0..1	<a href="#">AngleDegrees</a>	(NC) Voltage angle value from a power flow calculation on a given terminal.
valueA	0..1	<a href="#">CurrentFlow</a>	(NC) Current from a power flow calculation on a given terminal. The value shall be a positive value or zero.
valueVAR	0..1	<a href="#">ReactivePower</a>	(NC) Reactive power value from a power flow calculation on a given terminal. Load sign convention is used, i.e. positive sign means flow out from a TopologicalNode (bus) into the conducting equipment.

371

372

Table 6 shows all association ends of PowerFlowResult with other classes.

373

**Table 6 – Association ends of SecurityAnalysisResultProfile::PowerFlowResult with other classes**

374

mult from	name	mult to	type	description
0..*	ReportedByRegion	0..1	<a href="#">Region</a>	(NC) The region which reports this limit violation.
0..*	OperationalLimit	0..1	<a href="#">OperationalLimit</a>	(NC) The operational limit that has this limit violation.
0..*	ACDCTerminal	1..1	<a href="#">ACDCTerminal</a>	ACDC terminal where the powerflow result is located.

375

**3.6 (abstract) OperationalLimit root class**

376

377

A value and normal value associated with a specific kind of limit.



378 The sub class value and normalValue attributes vary inversely to the associated  
379 OperationalLimitType.acceptableDuration (acceptableDuration for short).  
380 If a particular piece of equipment has multiple operational limits of the same kind (apparent  
381 power, current, etc.), the limit with the greatest acceptableDuration shall have the smallest limit  
382 value and the limit with the smallest acceptableDuration shall have the largest limit value. Note:  
383 A large current can only be allowed to flow through a piece of equipment for a short duration  
384 without causing damage, but a lesser current can be allowed to flow for a longer duration.

385 **3.7 (abstract,NC) Region root class**

386 A region where the system operator belongs to.

387 **3.8 UnitMultiplier enumeration**

388 The unit multipliers defined for the CIM. When applied to unit symbols, the unit symbol is  
389 treated as a derived unit. Regardless of the contents of the unit symbol text, the unit symbol  
390 shall be treated as if it were a single-character unit symbol. Unit symbols should not contain  
391 multipliers, and it should be left to the multiplier to define the multiple for an entire data type.

392 For example, if a unit symbol is "m2Pers" and the multiplier is "k", then the value is  $k(m^{**2}/s)$ ,  
393 and the multiplier applies to the entire final value, not to any individual part of the value. This  
394 can be conceptualized by substituting a derived unit symbol for the unit type. If one imagines  
395 that the symbol "P" represents the derived unit "m2Pers", then applying the multiplier "k" can  
396 be conceptualized simply as "kP".

397 For example, the SI unit for mass is "kg" and not "g". If the unit symbol is defined as "kg", then  
398 the multiplier is applied to "kg" as a whole and does not replace the "k" in front of the "g". In  
399 this case, the multiplier of "m" would be used with the unit symbol of "kg" to represent one gram.  
400 As a text string, this violates the instructions in IEC 80000-1. However, because the unit symbol  
401 in CIM is treated as a derived unit instead of as an SI unit, it makes more sense to conceptualize  
402 the "kg" as if it were replaced by one of the proposed replacements for the SI mass symbol. If  
403 one imagines that the "kg" were replaced by a symbol "P", then it is easier to conceptualize the  
404 multiplier "m" as creating the proper unit "mP", and not the forbidden unit "mkg".

405 Table 7 shows all literals of UnitMultiplier.

406 **Table 7 – Literals of SecurityAnalysisResultProfile::UnitMultiplier**

literal	value	description
none	0	No multiplier or equivalently multiply by 1.
k	3	Kilo 10**3.
M	6	Mega 10**6.

407

408 **3.9 UnitSymbol enumeration**

409 The derived units defined for usage in the CIM. In some cases, the derived unit is equal to an  
410 SI unit. Whenever possible, the standard derived symbol is used instead of the formula for the  
411 derived unit. For example, the unit symbol Farad is defined as "F" instead of "CPerV". In cases  
412 where a standard symbol does not exist for a derived unit, the formula for the unit is used as  
413 the unit symbol. For example, density does not have a standard symbol and so it is represented  
414 as "kgPerm3". With the exception of the "kg", which is an SI unit, the unit symbols do not contain  
415 multipliers and therefore represent the base derived unit to which a multiplier can be applied as  
416 a whole.

417 Every unit symbol is treated as an unparseable text as if it were a single-letter symbol. The  
418 meaning of each unit symbol is defined by the accompanying descriptive text and not by the  
419 text contents of the unit symbol.

420 To allow the widest possible range of serializations without requiring special character handling,  
421 several substitutions are made which deviate from the format described in IEC 80000-1. The  
422 division symbol "/" is replaced by the letters "Per". Exponents are written in plain text after the  
423 unit as "m3" instead of being formatted as "m" with a superscript of 3 or introducing a symbol  
424 as in "m^3". The degree symbol "°" is replaced with the letters "deg". Any clarification of the  
425 meaning for a substitution is included in the description for the unit symbol.

426 Non-SI units are included in list of unit symbols to allow sources of data to be correctly labelled  
 427 with their non-SI units (for example, a GPS sensor that is reporting numbers that represent feet  
 428 instead of meters). This allows software to use the unit symbol information correctly convert  
 429 and scale the raw data of those sources into SI-based units.  
 430 The integer values are used for harmonization with IEC 61850.  
 431 Table 8 shows all literals of UnitSymbol.

432 **Table 8 – Literals of SecurityAnalysisResultProfile::UnitSymbol**

literal	value	description
none	0	Dimension less quantity, e.g. count, per unit, etc.
A	5	Current in amperes.
deg	9	Plane angle in degrees.
V	29	Electric potential in volts (W/A).
W	38	Real power in watts (J/s). Electrical power may have real and reactive components. The real portion of electrical power ( $I^2R$ or $VI\cos(\phi)$ ), is expressed in Watts. See also apparent power and reactive power.
VA	61	Apparent power in volt amperes. See also real power and reactive power.
VAr	63	Reactive power in volt amperes reactive. The "reactive" or "imaginary" component of electrical power ( $VI\sin(\phi)$ ). (See also real power and apparent power).  Note: Different meter designs use different methods to arrive at their results. Some meters may compute reactive power as an arithmetic value, while others compute the value vectorially. The data consumer should determine the method in use and the suitability of the measurement for the intended purpose.

433

### 434 3.10 PerCent datatype

435 Percentage on a defined base. For example, specify as 100 to indicate at the defined base.  
 436 Table 9 shows all attributes of PerCent.

437 **Table 9 – Attributes of SecurityAnalysisResultProfile::PerCent**

name	mult	type	description
value	0..1	<a href="#">Float</a>	Normally 0 to 100 on a defined base.
unit	0..1	<a href="#">UnitSymbol</a>	(const=none)
multiplier	0..1	<a href="#">UnitMultiplier</a>	(const=none)

438

### 439 3.11 DateTime primitive

440 Date and time as "yyyy-mm-ddThh:mm:ss.sss", which conforms with ISO 8601. UTC time zone  
 441 is specified as "yyyy-mm-ddThh:mm:ss.sssZ". A local timezone relative UTC is specified as  
 442 "yyyy-mm-ddThh:mm:ss.sss-hh:mm". The second component (shown here as "ss.sss") could  
 443 have any number of digits in its fractional part to allow any kind of precision beyond seconds.

### 444 3.12 Float primitive

445 A floating point number. The range is unspecified and not limited.

### 446 3.13 String primitive

447 A string consisting of a sequence of characters. The character encoding is UTF-8. The string  
 448 length is unspecified and unlimited.



449 **3.14 Boolean primitive**

450 A type with the value space "true" and "false".

451 **3.15 ActivePower datatype**452 Product of RMS value of the voltage and the RMS value of the in-phase component of the  
453 current.

454 Table 10 shows all attributes of ActivePower.

455 **Table 10 – Attributes of SecurityAnalysisResultProfile::ActivePower**

name	mult	type	description
multiplier	0..1	<a href="#">UnitMultiplier</a>	(const=M)
unit	0..1	<a href="#">UnitSymbol</a>	(const=W)
value	0..1	<a href="#">Float</a>	

456

457 **3.16 ApparentPower datatype**

458 Product of the RMS value of the voltage and the RMS value of the current.

459 Table 11 shows all attributes of ApparentPower.

460 **Table 11 – Attributes of SecurityAnalysisResultProfile::ApparentPower**

name	mult	type	description
multiplier	0..1	<a href="#">UnitMultiplier</a>	(const=M)
unit	0..1	<a href="#">UnitSymbol</a>	(const=VA)
value	0..1	<a href="#">Float</a>	

461

462 **3.17 Voltage datatype**

463 Electrical voltage, can be both AC and DC.

464 Table 12 shows all attributes of Voltage.

465 **Table 12 – Attributes of SecurityAnalysisResultProfile::Voltage**

name	mult	type	description
multiplier	0..1	<a href="#">UnitMultiplier</a>	(const=k)
unit	0..1	<a href="#">UnitSymbol</a>	(const=V)
value	0..1	<a href="#">Float</a>	

466

467 **3.18 AngleDegrees datatype**

468 Measurement of angle in degrees.

469 Table 13 shows all attributes of AngleDegrees.

470 **Table 13 – Attributes of SecurityAnalysisResultProfile::AngleDegrees**

name	mult	type	description
value	0..1	<a href="#">Float</a>	
unit	0..1	<a href="#">UnitSymbol</a>	(const=deg)
multiplier	0..1	<a href="#">UnitMultiplier</a>	(const=none)

471

472 **3.19 CurrentFlow datatype**473 Electrical current with sign convention: positive flow is out of the conducting equipment into the  
474 connectivity node. Can be both AC and DC.

475 Table 14 shows all attributes of CurrentFlow.

476 **Table 14 – Attributes of SecurityAnalysisResultProfile::CurrentFlow**

name	mult	type	description
multiplier	0..1	<a href="#">UnitMultiplier</a>	(const=none)
unit	0..1	<a href="#">UnitSymbol</a>	(const=A)
value	0..1	<a href="#">Float</a>	

477

478 **3.20 ReactivePower datatype**479 Product of RMS value of the voltage and the RMS value of the quadrature component of the  
480 current.

481 Table 15 shows all attributes of ReactivePower.

482 **Table 15 – Attributes of SecurityAnalysisResultProfile::ReactivePower**

name	mult	type	description
value	0..1	<a href="#">Float</a>	
unit	0..1	<a href="#">UnitSymbol</a>	(const=VAr)
multiplier	0..1	<a href="#">UnitMultiplier</a>	(const=M)

483

484 **3.21 (abstract) ACDCTerminal root class**485 An electrical connection point (AC or DC) to a piece of conducting equipment. Terminals are  
486 connected at physical connection points called connectivity nodes.487 **3.22 (NC) RemedialActionApplied root class**488 Remedial Action or Remedial Action Stage that has been applied to the power flow case which  
489 has the associated power flow result.

490 Table 16 shows all attributes of RemedialActionApplied.

491 **Table 16 – Attributes of SecurityAnalysisResultProfile::RemedialActionApplied**

name	mult	type	description
mRID	1..1	<a href="#">String</a>	(NC) Master resource identifier issued by a model authority. The mRID is unique within an exchange context. Global uniqueness is easily achieved by using a UUID, as specified in RFC 4122, for the mRID. The use of UUID is strongly recommended.  For CIMXML data files in RDF syntax conforming to IEC 61970-552, the mRID is mapped to rdf:ID or rdf:about attributes that identify CIM object elements.

492

493 Table 17 shows all association ends of RemedialActionApplied with other classes.

494 **Table 17 – Association ends of SecurityAnalysisResultProfile::RemedialActionApplied**  
495 **with other classes**

mult from	name	mult to	type	description
0..*	PowerFlowResult	1..1	<a href="#">PowerFlowResult</a>	(NC) Power flow result that is obtained when the remedial action is applied.
0..*	RemedialAction	1..1	<a href="#">RemedialAction</a>	(NC) Remedial action that is applied.
0..*	StageForRemedialAction Scheme	0..1	<a href="#">Stage</a>	(NC) The stage of the remedial action scheme that is applied.

496

### 497 3.23 (abstract,NC) RemedialAction root class

498 Remedial action describes one or more actions that can be performed on a given power system  
499 model situation to eliminate one or more identified breaches of constraints. The remedial action  
500 can be costly, and have a cost characteristic, or non costly.

### 501 3.24 (NC) Stage root class

502 Stage of a remedial action scheme.

503

504

## 505 **Annex A (informative): Sample data**

### 506 **A.1 General**

507 This Annex is designed to illustrate the profile by using fragments of sample data. It is not meant  
508 to be a complete set of examples covering all possibilities of using the profile. Defining a  
509 complete set of test data is considered a separate activity to be performed for the purpose of  
510 setting up interoperability testing and conformity related to this profile.

### 511 **A.2 Sample instance data**

512 Test data files are available in the CIM EG SharePoint.